
\mathbf{X}


Baseline product line

Ajax SpaceControl Jeweller

Wireless key fob for Ajax system control.

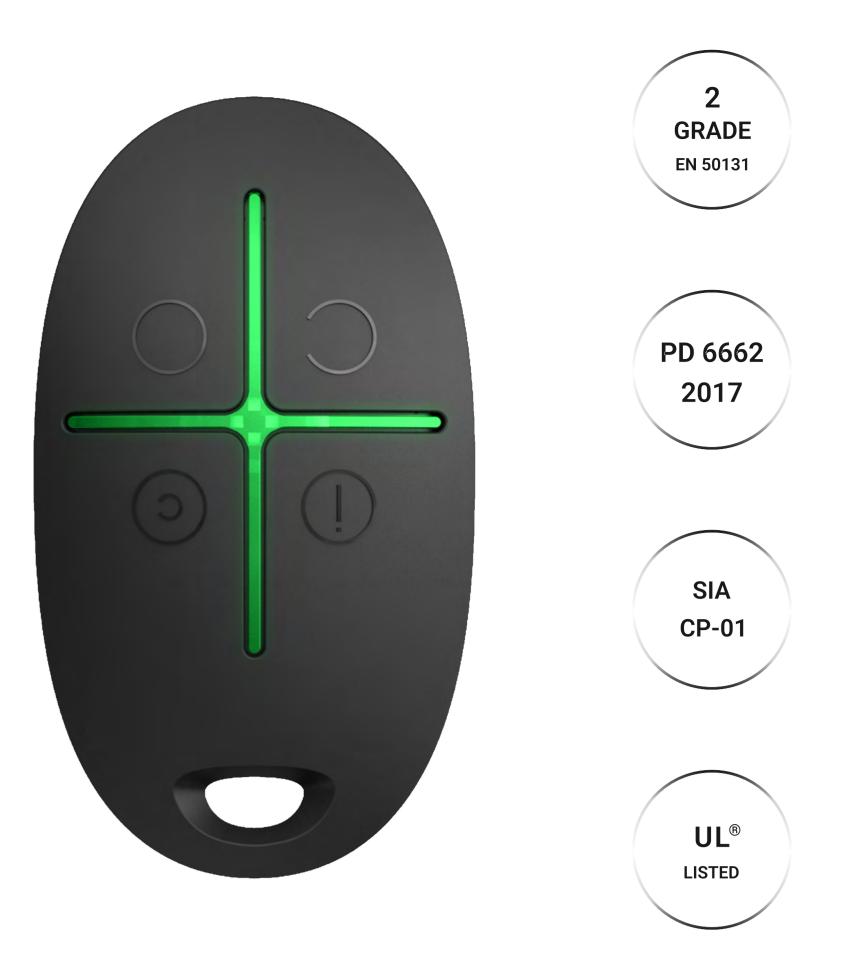

4 buttons

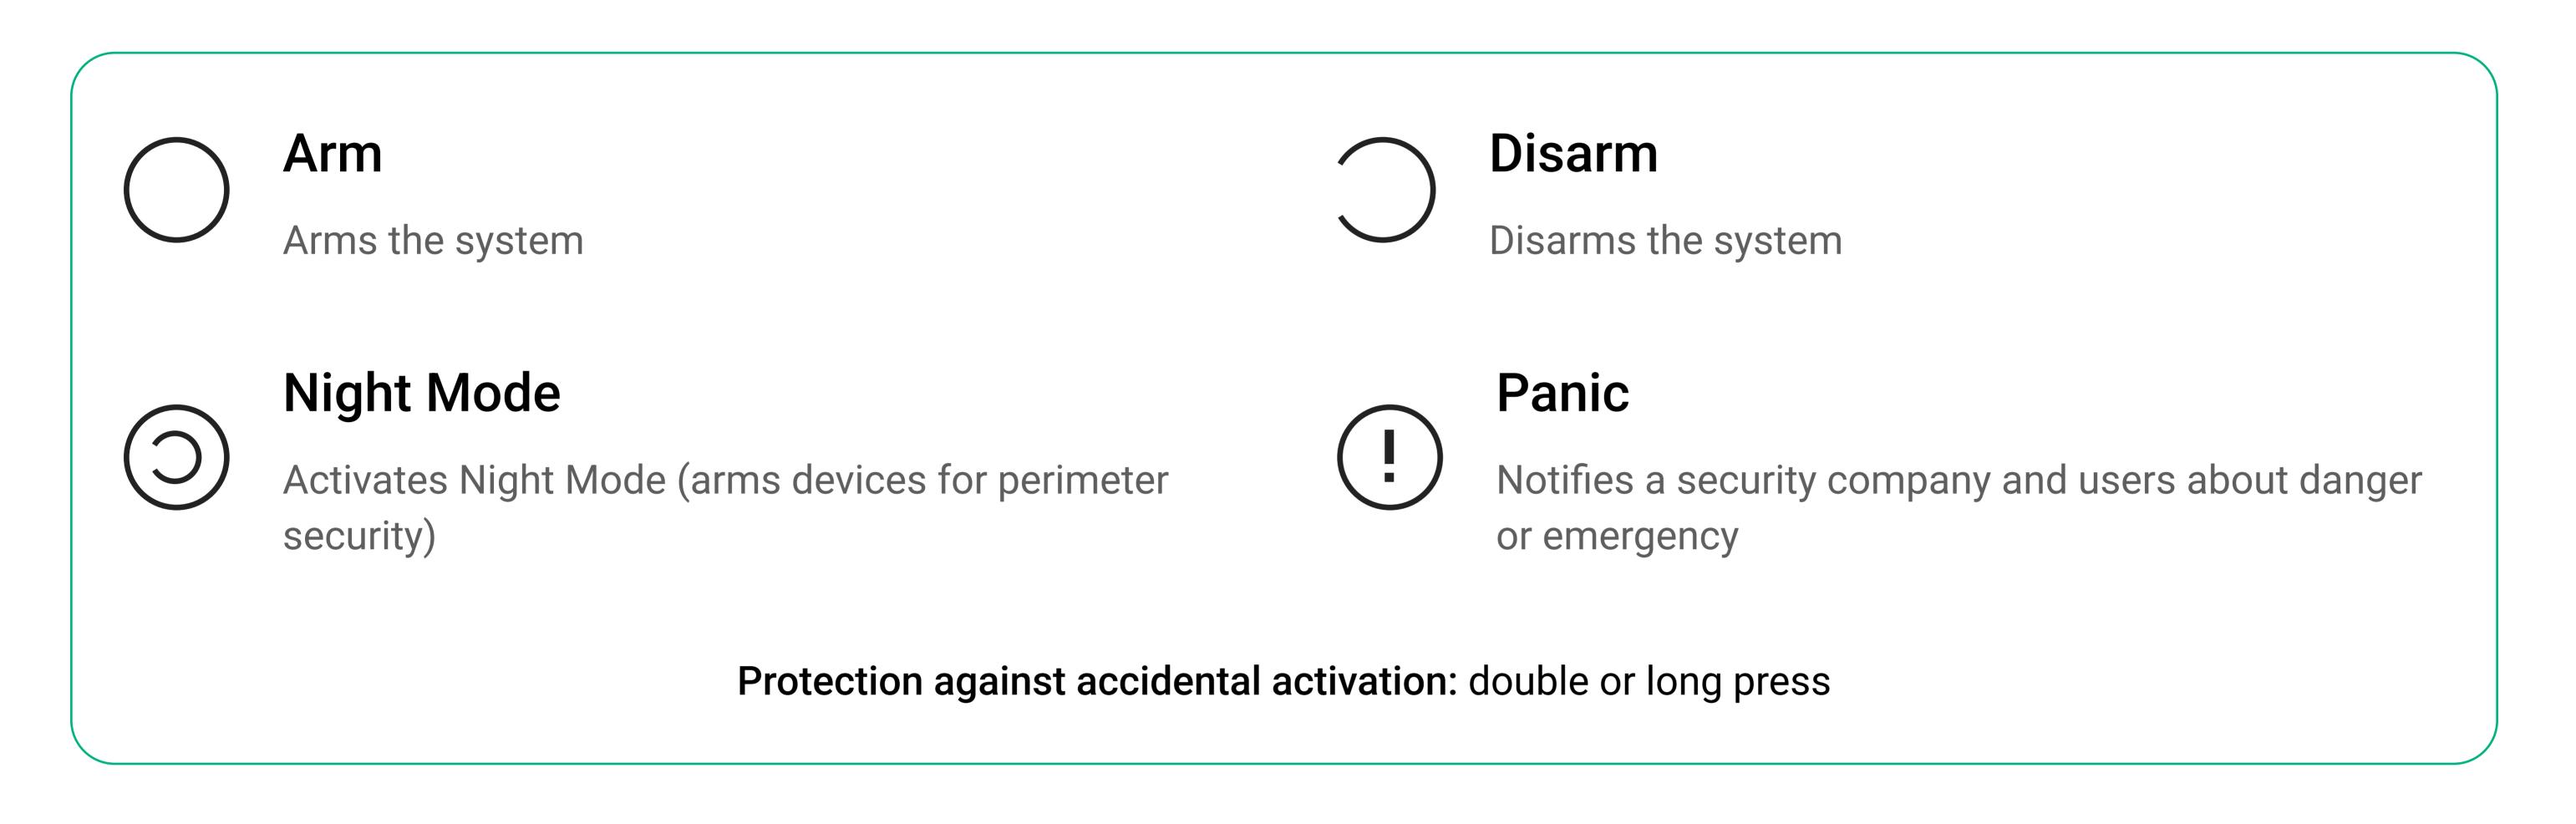



- Up to 1,300 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Indication of command execution by LED



- Up to 5 years of operation
- Pre-installed replaceable battery
- Low battery warning



- Pairing with a hub via QR code
- Remote control and configuration in the app
- It can be carried around in a pocket or on the key ring

Compliance

EN 50131 (Grade 2) PD 6662:2017 SIA CP-01 UL985, UL1023, UL2610 ULC S545, ULC S304

Compatibility

Hubs Hub (2G) Jeweller

Hub (4G) Jeweller Hub Plus Jeweller Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G)

Range extenders ReX, ReX 2

Communication with control panel

Jeweller communication technology

Frequency bands 866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz 905.0-926.5 MHz 915.85-926.5 MHz 921.0-922.0 MHz Depends on the region of sales.

Jeweller communication range up to 1,300 m

Power supply

Battery 1 × CR2032 Pre-installed.

Battery life up to 5 years

MΡ		1,000		
In	an	open	space.	

Enclosure

Operating temperature range from -25°C to +50°C

Operating humidity up to 95%

Protection class

Colour white black

Dimensions

Weight

13 g

65 × 37 × 10 mm

Complete set

Ajax SpaceControl Jeweller 1 × CR2032 battery (pre-installed) Quick start guide



For detailed information, scan the QR code or follow the link:

support.ajax.systems/en/manuals/ajaxspacecontrol



- @AjaxSystemsSupport_Bot
- ajax.systems